


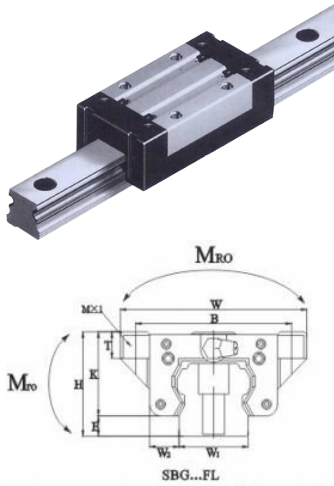

Type :	SBG20SL
Mounting Dimensions	
Height(H) :	30
E :	3.6
W2 :	12
Width(W) :	44
Length(L) :	74
Block Dimensions	
Mounting tab hole(B×J) :	32*36
Mounting tab hole(M×L) :	M5*6
L1 :	50.8
J1 :	7.4
K :	26.5
T :	8
Nipple Mounting Hole :	M6*0.75
Nipple(T1) :	4.45
Nipple(N) :	12
Rail Size	
Width(W1) :	20
Height(H1) :	17.5
Pitch(F) :	60
Bolt Hole(d×D×h) :	6*9.5*8.5
G :	20
Max.length Of rail Lomax :	3040
Load capacity	
Dynamic C(kgf) :	1400
Sationary Co(kgf) :	2420
Stationary moment(kgf.M) MRO :	22
Stationary moment(kgf.M) MPO :	18
Stationary moment(kgf.M) MRO :	18
Weight	
bearing (kgf) :	0.36
rail (kgf/M) :	2.16