


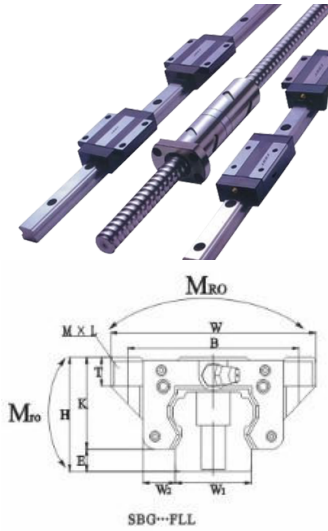

Type : SBG30SLL

Mounting Dimensions

Height(H) : 45

E : 5.5

W2 : 15.5

Width(W) : 60

Length(L) : 120.5

Block Dimensions

Mounting tab hole(B×J) : 40*60

Mounting tab hole(M×L) : M8*10

L1 : 93

J1 : 16.5

K : 39.5

T : 8

Nipple Mounting Hole : M6*0.75

Nipple(T1) : 11.5

Nipple(N) : 12

Rail Size

Width(W1) : 28

Height(H1) : 25

Pitch(F) : 80

Bolt Hole(d×D×h) : 9*14*12

G : 20

Max.length Of rail Lomax : 4440

Load capacity

Dynamic C(kgf) : 3800

Sationary Co(kgf) : 6375

Stationary moment(kgf.M) MRO : 80

Stationary moment(kgf.M) MPO : 86

Stationary moment(kgf.M) MRO : 85

Weight

bearing (kgf) : 1.2

rail (kgf/M) : 4.5