


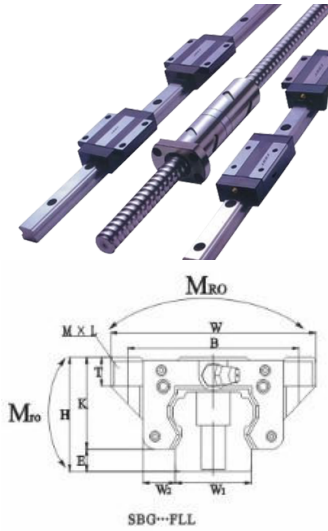

Type : SBG20SLL

Mounting Dimensions

Height(H) : 30

E : 3.6

W2 : 11.5

Width(W) : 44

Length(L) : 90

Block Dimensions

Mounting tab hole(B×J) : 32*36

Mounting tab hole(M×L) : M5*6

L1 : 66.8

J1 : 8.4

K : 26.5

T : 8

Nipple Mounting Hole : M6*0.75

Nipple(T1) : 4.45

Nipple(N) : 12

Rail Size

Width(W1) : 20

Height(H1) : 17.5

Pitch(F) : 60

Bolt Hole(d×D×h) : 6*9.5*8.5

G : 20

Max.length Of rail Lomax : 3040

Load capacity

Dynamic C(kgf) : 2170

Sationary Co(kgf) : 3240

Stationary moment(kgf.M) MRO : 31

Stationary moment(kgf.M) MPO : 35

Stationary moment(kgf.M) MRO : 35

Weight

bearing (kgf) : 0.4

rail (kgf/M) : 2.16